


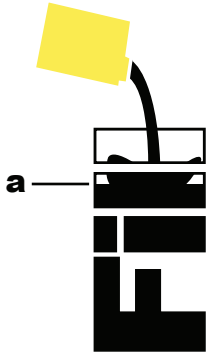

SMART

Our wheels are always turning.

TRUCK BED LINER - BLACK

<p>Features & Benefits</p>	<p>SMART Truck Bed Liner is a 2K paint designed for applying to the rear bed of pick up trucks. The urethane formulation dries rapidly and provides excellent UV protection. Users can control the pot life and drying times by choosing different speeds of SMART hardeners.</p> <p>Also available as tintable version.</p> <ul style="list-style-type: none"> • Easy to use: simply FILL - AGITATE – SPRAY • Enough material to re-spray the largest truck beds. • No need to wax after application. • Abrasion & stain resistant. • Protects against rust, corrosion salt, damp & extreme temperatures. • Waterproof, flexible, helps deaden sound & vibrations. • Apply with schutz gun, roller or brush to obtain different textures. • Provides excellent adhesion
<p>Health and Safety Statement</p>	<p>FOR PROFESSIONAL USE ONLY. Read full instructions before use.</p> <p>IMPORTANT: This product contains hazardous materials and therefore appropriate personal protective equipment should always be used. Please refer to the label and consult the material safety data sheet for full handling instructions and personal protection information. These are available via your local branch or you can submit a request at www.finishmaster.com. Gearhead Products disclaim any liability where the user does not wear the recommended personal protective equipment.</p>
<p>Surface Preparation</p>	<p>SMART's Truck Bed Liner can be applied to most original manufacturers finishes.</p> <p>The surface should be lightly scuffed, and free from dirt and rust.</p> <p>For best results bare metal should be treated with a suitable etch primer.</p>
<p>Specification</p>	<p>Mixing Ratio - 3:1 Truck Bed Liner Base: System 20 Hardener of choice.</p> <p>Pot life at 68°F / 20°C : 60 minutes.</p> <p>Touch Dry at 68°F / 20°C : <1 hour subject to film build.</p> <p>Light duty: 2-3 days at 68°F / 20°C.</p> <p>Regular duty: 5-7 days at 68°F / 20°C.</p> <p>Coverage: 125 square foot per US Gallon (mixed).</p>
<p>Application</p>	<div style="display: flex; justify-content: space-around; align-items: center;">  <div style="text-align: center;">  </div> <div style="text-align: center;">  </div> </div> <p>FILL hardener to level A (see diagram above) of the bottle (this equates to 250ml of SMART Hardener).</p> <p>Replace cap and AGITATE the bottle filled with hardener vigorously for 2 minutes.</p> <p>SPRAY - Remove cap and attach to the Schutz gun with air pressure 2.76 -4.82 BAR (40-70 PSI). Apply to truck bed with an even sweeping motion to obtain the required texture.</p> <p>Subsequent coat(s) can be applied observing a 60 minute flash off period between coat(s).</p> <p>Future touch-ups can be carried out after simply cleaning and degreasing the surface.</p>



Our wheels are always turning.

	Reducing the flash off times, excessive film build and/or reduced temperatures will retard the drying times. Customized finishes can be achieved by first applying one colour, allowing to flash off, then over-coating with a second colour, increasing the distance from the truck bed and the speed of coverage to provide a multi coloured finish.
Cleaning	All equipment should be thoroughly cleaned with gun wash immediately after use.
IMPORTANT	Do not use in extreme cold or hot temperatures. Ideal application temperature is 68°F (20°C) with humidity of less than 60%. Do not place heavy loads on the surface until the truck bed liner is fully cured.

PRODUCT CODES

Kit Contents	4 x 750ml Truck Bed Liner Base 1 x 1L Hardener Total Kit = 4 liters or 1.06 US Gallons
---------------------	----------------------------------------------------------------------------------------------

Product Code	Description	Case Quantities
SMT2930	SMART Truck Bed Liner Kit Black 4x750ml truck bed liner base + 1L of hardener	
SMT2931	SMART Truck Bed Liner Kit Tintable 4x750ml truck bed liner base + 1L of hardener	

VOC INFORMATION

As Packaged:

	SMT2930/SMT2931	
VOC Regulatory	329g/l	2.7lbs/gal
VOC Actual	252g/l	2.1lbs/gal
Volatiles	39.21% by weight	
Water	0% by weight	0% by volume
Exempt Compounds	16.60% by weight	23.43% by volume

STANDARD HARDENER	
275g/l	2.3lbs/gal
201g/l	1.7lbs/gal
45.07% by weight	
0% by weight	0% by volume
27.07% by weight	32.44% by volume
1112g/l	9.3lbs/gal